

FUEL CELL AND METHOD FOR ITS CONTROL

Publication number: WO9637920
Publication date: 1996-11-28
Inventor: OKAMOTO TAKAFUMI (JP)
Applicant: HONDA MOTOR CO LTD (JP); OKAMOTO TAKAFUMI (JP)
Classification:
- **international:** H01M8/02; H01M8/04; H01M8/24; H01M8/02; H01M8/04; H01M8/24; (IPC1-7): H01M8/02; H01M8/04; H01M8/06
- **european:** H01M8/02B2; H01M8/02C; H01M8/04B4; H01M8/24B2
Application number: WO1996JP01403 19960524
Priority number(s): JP19950126378 19950525; JP19950145884 19950613; JP19950159608 19950626

Also published as:

EP0833400 (A1)

US6214486 (B1)

US6042955 (A1)

EP0833400 (A4)

EP0833400 (B1)

more >>

Cited documents:

JP6020713

JP6338338

JP6068898


JP6275284

JP2129858

more >>

Report a data error here

Abstract of WO9637920
Fuel gas and oxidizing gas are supplied through different paths above a first manifold plate (42), a first planar pressure generation plate (44), a separator body (48), a second planar pressure generation plate, a second manifold plate (50), a first gasket (30), a solid polymer electrolyte film (22) and a second gasket (32), while cooling water is supplied from below. This cooling water flows upward in the separator body (48), and it makes the temperature distribution of a fuel cell (20) uniform.

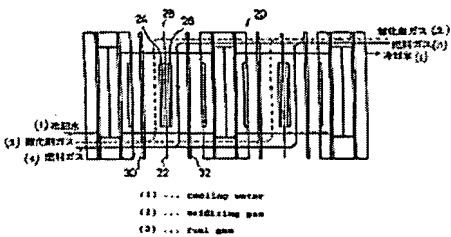

Data supplied from the esp@cenet database - Worldwide